


- **High visibility dual 4-digit display**
  - shows set point and process variable
- **Standard relay or logic control output**
  - simple time proportioning or on/off control
- **Optional alarm relay**
  - additional relay to give hi/lo process alarm
- **Universal process input**
  - direct connection for any process signal
- **IP65 (NEMA3) protection and full noise immunity**
  - reliability in the harshest environments
- **NEMA 4X / IP66 construction**
  - hose-down protection
- **One-shot autotune**
  - automatic setting of optimum PID values



**C50 – the 1/16 DIN controller to suit  
your simplest applications**


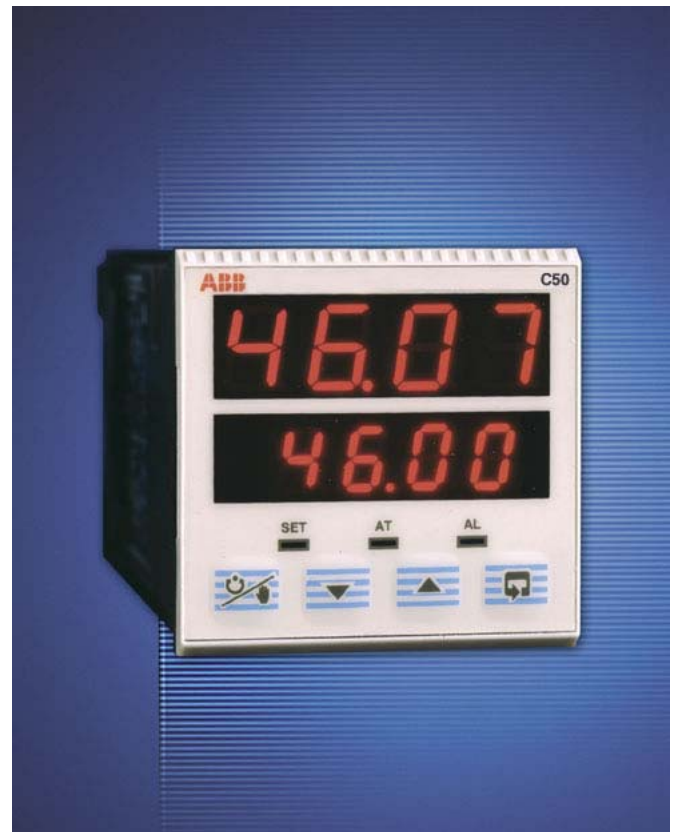



### C50

The C50 Controller/Alarm unit is a compact single loop controller, with the capability to measure, indicate and control a variety of process variables.

The unit is ideal for simple PID control, offering On/Off or Time proportioning control with a one shot self-tune facility. The C50 can also act as an independent alarm unit, for example, as an over-temperature safety cutout unit for furnaces or ovens.


The unit is quickly set up for most process signal inputs and, with IP65 (NEMA3) front panel protection, is suitable for a wide range of applications.

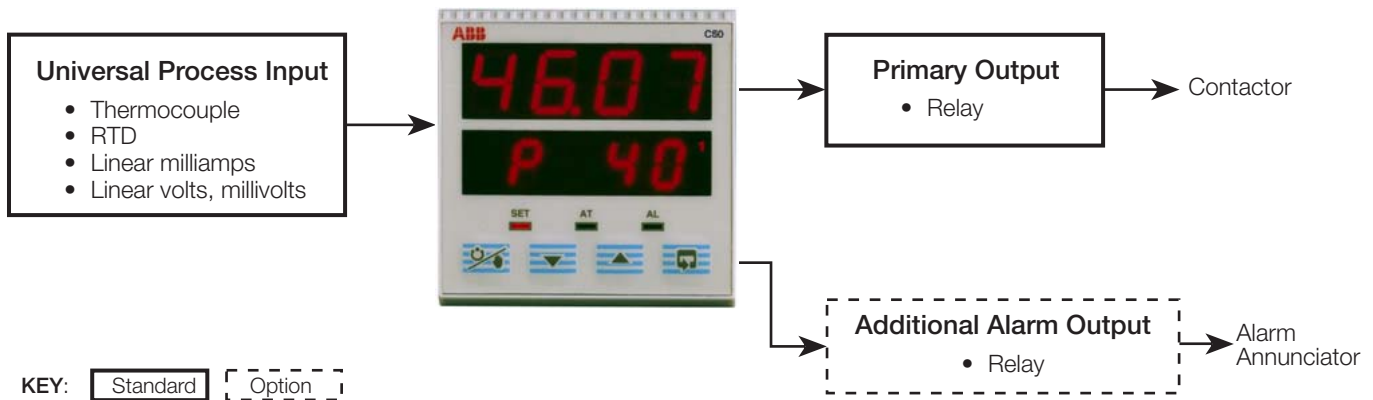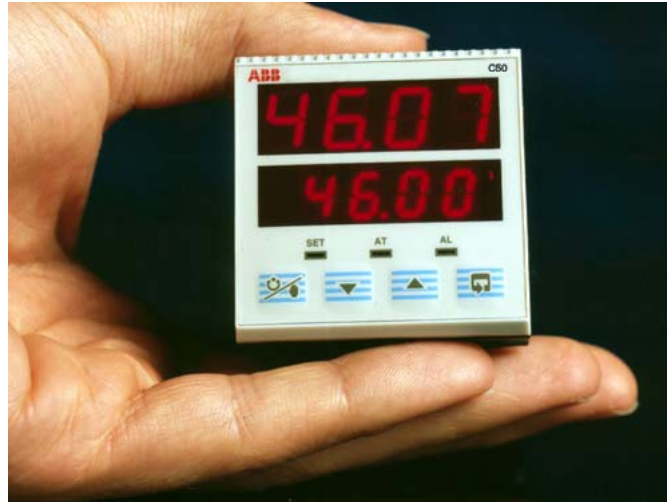




**PID Control**

The unit's primary relay or logic output can provide a time proportioning PID output, for control of contactors.

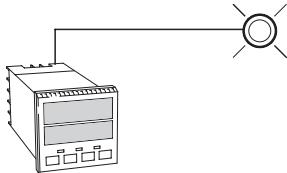

**Override Alarm**

By configuring the relay output as an overrange alarm, the C50 can act as an independent alarm unit, providing protection for your process.



**Ramping Set Point**

To reduce shock to the process when changing set point, the C50 can be configured to ramp up to the new set point over a preset period of time.



## Specification

### Summary

PID single loop controller/alarm unit  
Autotune Facility  
Fully User Configurable  
IP65 (NEMA3) Front Face

### Operation

#### Display

High intensity, 7-segment, 2 x 4 red LED display

Size upper 10mm (0.39 in.)  
lower 8mm (0.31 in.)

#### Configuration

User defined via front panel and internal links.

### Outputs

#### Primary output (fitted as standard)

Relay SPDT 2A 120/240V AC

#### Output functions

User configurable as either:

On/Off control output

Time proportioning PID control output

### Physical

#### Size

48mm (1.89 in.) x 48mm (1.89 in.)  
x 110mm (4.33 in.) (depth behind panel)

#### Weight

<200g (0.44lbs.) approx.

### Option

Second relay output, configurable for alarms, meets the specification of the standard relay output.

### Electrical

#### Voltage:

90 to 264 V AC 50/60 Hz

#### Power consumption:

<4VA

### EMC

#### Emissions and Immunity

Meets requirements of IEC 61326 for an Industrial Environment



## Analog Inputs

Single universal process input

### Type

Universally Configurable for:  
 Thermocouple (THC)  
 Resistance Thermometer (RTD)  
 Linear Millivolt  
 Linear Current  
 Linear DC voltage

### Input Sampling Rate

1 sample/250ms

### Input impedance:

Millivolts/THC/RTD >100MΩ  
 Volts >47KΩ  
 Current <4.7Ω

### Linearizer functions

Automatic linearisation of THC types B, J, K, R, S, T, L, N and RTD Pt100

### Broken Sensor protection

For the following options, break detected within two seconds and control outputs DOWN scale to OFF (0% power):

THC, RTD, DC mV, DC Volts (1 to 5V and 2 to 10V), DC mA (4 to 20mA).

### Cold junction compensation:

Automatic CJC incorporated as standard.

### Input noise rejection

Common mode rejection >120dB at 50/60Hz with balanced lead  
 Series mode rejection >500% of span at 50/60Hz

### Accuracy

Measurement error <± 0.25% of span ± 1LSD  
 Linearizer Typically ±0.2°C  
 Display range -1999 to +9999  
 CJC accuracy <± 0.05°C /°C change in ambient temperature

## Electrical Input Ranges

Input Type	Min. Value	Max. Value	Min. Value	Max. Value
mV	0	50	10	50
V	0	5	1	5
V	0	10	2	10
mA	0	20	4	20

## Temperature Limits

THC Type Per NBS125 & IEC584	°C		°F	
	Min.	Max.	Min.	Max.
Type R	0	1650	32	3002
Type S	0	1649	32	3000
Type J	0	205.4	32	401.7
	0	450	32	842
	0	761	32	1401
Type T	-200	262	-328	503
	0	260.6	32	501
Type K	-200	760	-328	1399
	-200	1373	-328	2503
Type L	0	205.7	32	402.2
	0	450	32	841
	0	762	32	1403
Type B	100	1842	211	3315
Type N	0	1399	32	2550
	0	800	32.0	1471
Type RTD per DIN 43760 & IEC751	-100.9	100	-149.7	211.9
	-200	206	-328	402
	-100.9	537.3	-149.7	999
	0	100.9	32	213.6
	0	300	32	571
	0	800	32.0	1471

#### Note.

Performance accuracy is not guaranteed below 600°C (112°F) for types B, R and S thermocouples.

RTD, 3-wire platinum, 100Ω with range of 0 to 400Ω.





### Ordering Information

C50 1/16 DIN Controller/Alarm Unit	C50	/	X	X	X	X	X	X	X
<b>Language (for manuals only)</b>									
English									
French									
German									
			K						
			F						
			D						
<b>Input Types</b>									
Universal									2
<b>Output 1</b>									
Relay									1
<b>Output 2</b>									
None									0
1 Relay									1
<b>Programming/Special Features</b>									
None									0 0 0



ABB has Sales & Customer Support  
expertise in over 100 countries worldwide

The Company's policy is one of continuous product  
improvement and the right is reserved to modify the  
information contained herein without notice.

Printed in UK (01.06)

© ABB 2006

**ABB**

*Distributed by*

 PO Box 1 • Ilkley • West Yorkshire • LS29 8EU  
Phone: 01943 602001 • Fax: 01943 816796  
Website: [www.issltd.co.uk](http://www.issltd.co.uk) • Email: [sales@issltd.co.uk](mailto:sales@issltd.co.uk)  
**Instrumentation**  
**Systems & Services Ltd**

SS/C50 Issue 9



**Tel: (01943) 602001 - WWW.ISSLTD.CO.UK - Fax: (01943) 816796**

