


1/4 DIN Motorized Valve Controller

Industrial^{IT}
enabled™

V250
PO Box 1 • Ilkley • West Yorkshire • LS29 8EU
Phone: 01943 602001 • Fax: 01943 816796
Website: www.issltd.co.uk • Email: sales@issltd.co.uk

Instrumentation
Systems & Services Ltd

- **Boundless motorized valve controller**
 - no need for slidewire feedback; improves reliability
- **Two sealed 5A control relays**
 - suitable for direct connection to the valve, reducing installation costs
- **Universal process input with integral 2-wire transmitter power supply**
 - direct connection for any process signal
- **Retransmission of process variable**
 - analog output for recorder or datalogger
- **IP66/NEMA4X front face**
 - ideal for use in the harshest environments
- **Quick code, front face or PC configuration**
 - easy operation and commissioning using our Windows™-based software
- **RS485/Modbus serial communication**
 - SCADA, PLC or open system integration

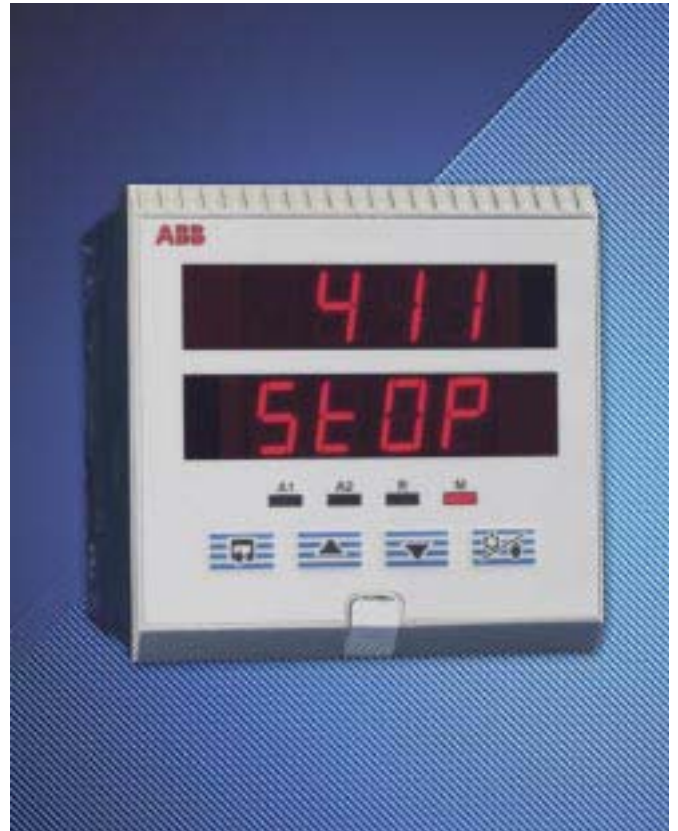

V250
– dedicated 1/4 DIN controller for motorized valves

ABB

V250

The V250 Valve Position controller is a dedicated, single loop controller designed for direct control of motorized valves.

Universal input and integral transmitter power supply ensure that the V250 has the capabilities to measure a wide range of process signals such as temperature, pressure, flow and level.


Two 5A relays are fitted as standard for either direct control of the positioner or via intermediate relays plus retransmission of the process variable for connection to a recorder or datalogger. Further I/O capabilities can be added, such as an alarm relay, remote set point and digital input, to suit the application.

The configuration of the V250 is achieved by moving the security switch and entering a simple code from the front panel keys or via our PC configuration package. No passwords, no input links, no complications.

With IP66/NEMA4X front panel protection and superior RF immunity as standard the V250 has been designed to control reliably in the harshest of today's industrial environments.



Process Connections

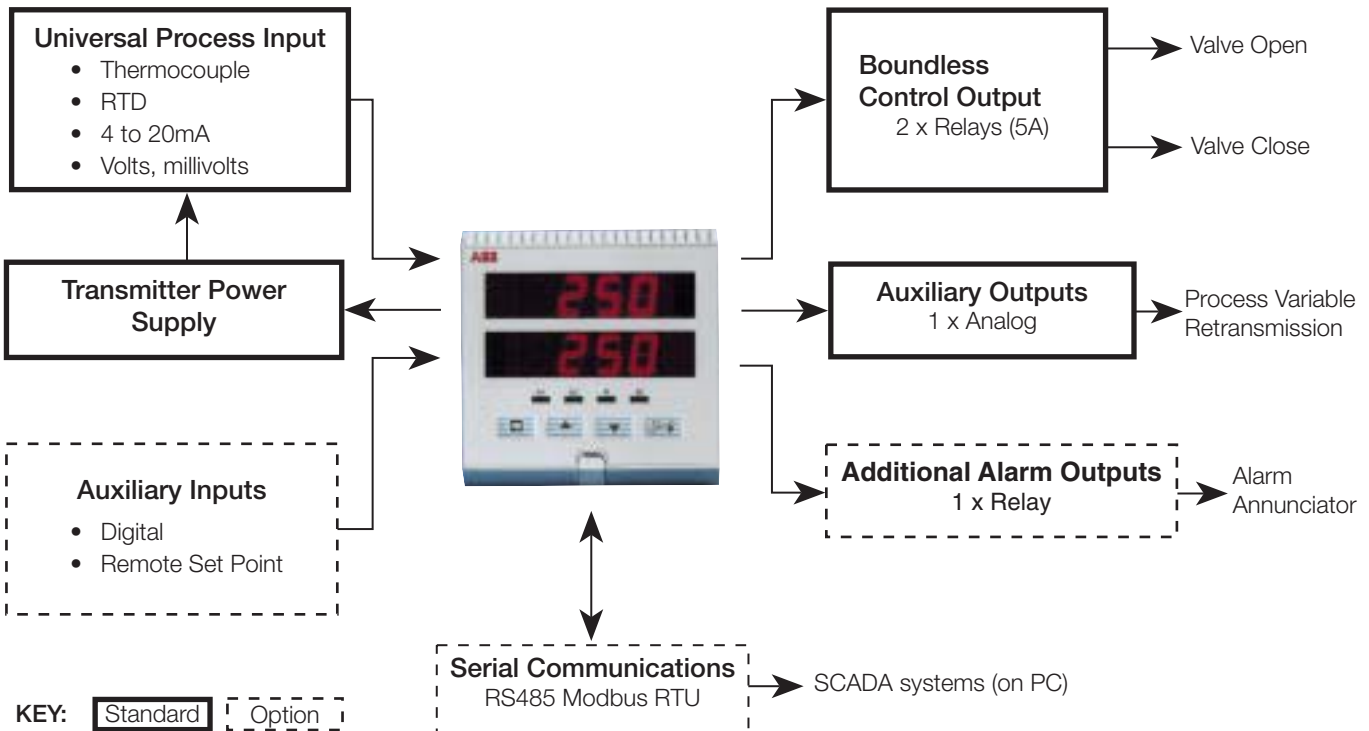

Applications

PID Control
Boundless control of an electrically-positioned valve with a travel time between 10 and 5000s using in-built 5A relays. The V250 gives pulsed outputs to the valve which are based on the difference in Process Variable and Set Point. The V250 signals the direction and time of travel to the valve. The controller does not require information on the absolute regulator position but uses the PV inputs as its feedback. The deadband setting prevents the valve from hunting.

Retransmission
As standard the V250 has a 4 to 20mA retransmission output of the process variable for connection to a chart recorder, datalogger or PLC.

PC Configuration
To make configuration of the V250 quicker and simpler, a Windows-based configuration software package is available. The V250 is supplied with an in-built PC configurator port as standard. Configurations can be saved and downloaded to other instruments and a printout generated.

Quick Code Setting
A simple 4-digit code enables all standard parameters to be set from the front face.

Ramp/Soak Set Point Profiles
The ramp/soak facility available on every V250 provides for a single program, four-segment profile. This facility also includes guaranteed ramp/soak, repeat program, skip and reset features.

RS485/Modbus
Fitted with an optional RS485 serial communication board, the V250 can communicate with PLCs and SCADA systems using the Modbus protocol.



Specification

Summary

PI, PID single loop, valve position controller

Fully user configurable

NEMA4X/IP66

PC configuration

Operation

Display

High-intensity 7-segment, 2 x 4-digit LED display

Display range -999 to +9999

Display resolution ±1 digit

Display height 14mm (0.56 in.)

Configuration

User-defined via front panel or via PC configurator

Control Functions

Control types

P+I or P+I+D Boundless

Valve travel time

10 to 5000s

Adjustable deadband (engineering units)

-999 to +9999

Control terms

P = 0.1 to 999.9%

I = 1 to 7200s

D = 0.1 to 999.9s

Set points strategies

Local

Remote

4 selectable, fixed value

Ramping Set Point

Profile controller

Number 4 Ramp/Soak segments

Features Guaranteed Ramp/Soak, Self-seeking Set point, Program Repeat

Controls Run, Hold and Stop from Front Panel Switches
Run/Hold or Run/Stop from digital input

Alarms

Number Two user-defined

Type High/Low process
High/Low deviation

Standard Build

Relay output

Two relays with arc suppression components included as standard (SPDT) – 5A @ 115/230V AC

Logic output

18V DC at 20mA

Min. load 400Ω

PV retransmission

Analog, configurable in the range of 4 to 20mA

Max. load 15V (750Ω at 20mA)

Accuracy ≤ 0.25% of span

Analog Inputs

Number

One standard process variable

One optional remote set point input

Input sampling rate

250ms per channel

Type

Universally configurable

Channel 1 Thermocouple (THC)
Resistance Thermometer (RTD)
Millivolt
Current
DC voltage

Channel 2 4 to 20mA

Input impedance

mA 100Ω

mV, V >10MΩ

Linearizer functions

Programmable for standard inputs:
√, THC types B, E, J, K, N, R, S, T or Pt100

Broken sensor protection

Upscale drive on THC and RTD

Downscale drive on milliamps and voltage

Cold junction compensation

Automatic CJC incorporated as standard

Stability <0.05°C/°C change in ambient temperature

Input protection

Common mode isolation >120dB at 50/60Hz with 300Ω imbalance

Series mode rejection >60dB 50/60Hz

Transmitter power supply

24V, 30mA max. powers one 2-wire transmitter

Optional I/O specification

Relay output

SPDT 5A @ 115/230V AC

Digital input

Type Volt-free

Minimum pulse 250ms

Modbus serial communications

Connections RS422/485, 2- or 4-wire

Speed 2.4k or 9.6k baud rate

Protocol Modbus RTU slave

Remote Set Point Input

4 to 20 mA DC, 100Ω nominal input impedance

Preset to process variable engineering units



Physical

Size

96 wide x 96 high x 122.5mm deep
(3.78 in. wide x 3.78 in. high x 4.82 in. deep)

Weight

520g (1.1 lb) approx.

Electrical

Voltage

85 to 265V AC (50/60Hz)
24V DC

Power consumption

<6VA

Power interruption protection

<60ms/<3 cycles, no effect
>60ms/>3 cycles, instrument returns to operation after a controlled reset

Environmental

Operating limits

0 to 55°C (32 to 131°F)
5 to 95% RH non-condensing

Temperature stability

<0.02% of reading or 2µV/°C (1µV/°F)

Front face

IP66 (NEMA4X), case rear IP20

EMC

Emissions

Meets requirements of EN50081-2

Immunity

Meets requirements of EN50082-2

Design and manufacturing standards

Designed to meet CSA requirements
CE Mark

Electrical safety

EN61010

Standard Analog Input Ranges

Thermocouple	Maximum Range °C	Maximum Range °F	Accuracy (% of reading)
B	-18 to 1800	0 to 3270	0.25% or ±2°C (3.6°F) [above 200°C (392°F)] *
E	-100 to 900	-140 to 1650	0.25% or ±0.5°C (0.9°F)
J	-100 to 900	-140 to 1650	0.25% or ±0.5°C (0.9°F)
K	-100 to 1300	-140 to 2350	0.25% or ±0.5°C (0.9°F)
N	-200 to 1300	-325 to 2350	0.25% or ±0.5°C (0.9°F)
R	-18 to 1700	0 to 3000	0.25% or ±1.0°C (1.8°F) [above 300°C (572°F)] *
S	-18 to 1700	0 to 3000	0.25% or ±0.5°C (0.9°F) [above 200°C (392°F)] *
T	-250 to 300	-400 to 550	0.25% or ±0.5°C (0.9°F)

* For B, R and S thermocouples, performance accuracy is not guaranteed below value stated

Min. span below zero Type T 70°C (126°F) THC standards DIN 43710
Type N 105°C (189°F) IEC 584

RTD	Maximum Range °C	Maximum Range °F	Accuracy (% of reading)**
Pt100	-200 to 600	-325 to 1100	0.25% or ±0.5°C (0.9°F)

** RTD, 3-wire platinum, 100Ω per DIN 43760 standard (IEC 751), with range of 0 to 400Ω


Linear Inputs	Range	Accuracy (% of reading)
Milliamps	0 to 20mA	0.25% or ±2µA
Milliamps	4 to 20mA	0.25% or ±2µA
Volts	0 to 5V	0.25% or ±200µV
Volts	1 to 5V	0.25% or ±200µV
Millivolts	0 to 50mV	0.25% or ±20µV

Square Root Input	Range	Accuracy (% of reading)***
Milliamps	4 to 20mA	0.25% or ±2µA


*** Below input of 4.64mA (20% flow) the input is linear



Overall Dimensions

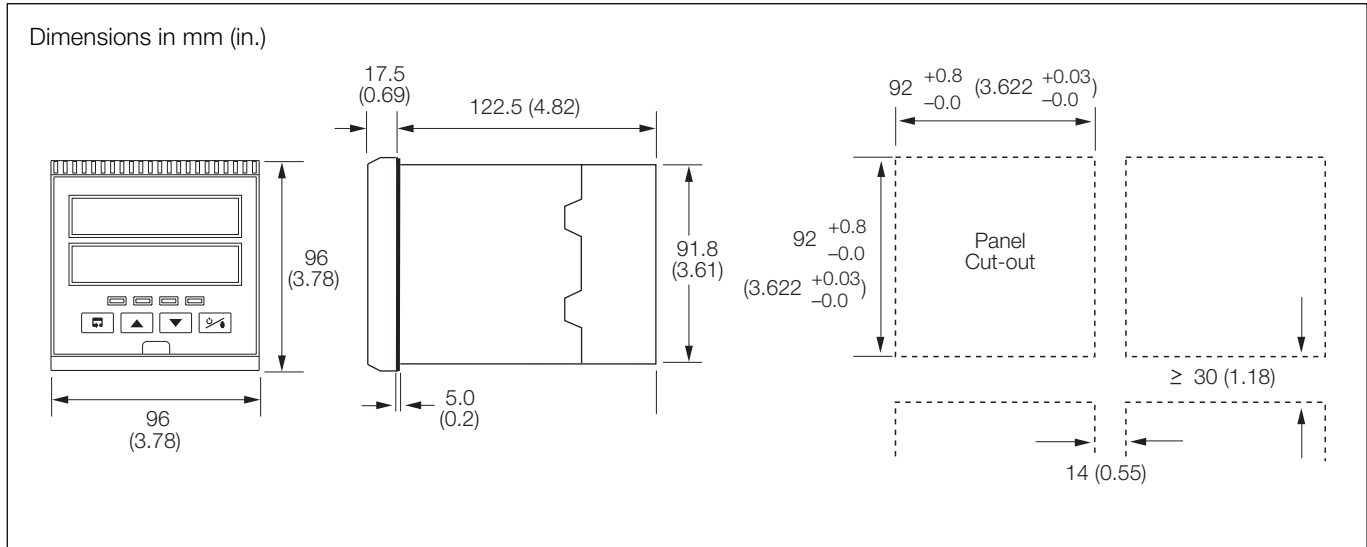

Electrical Connections

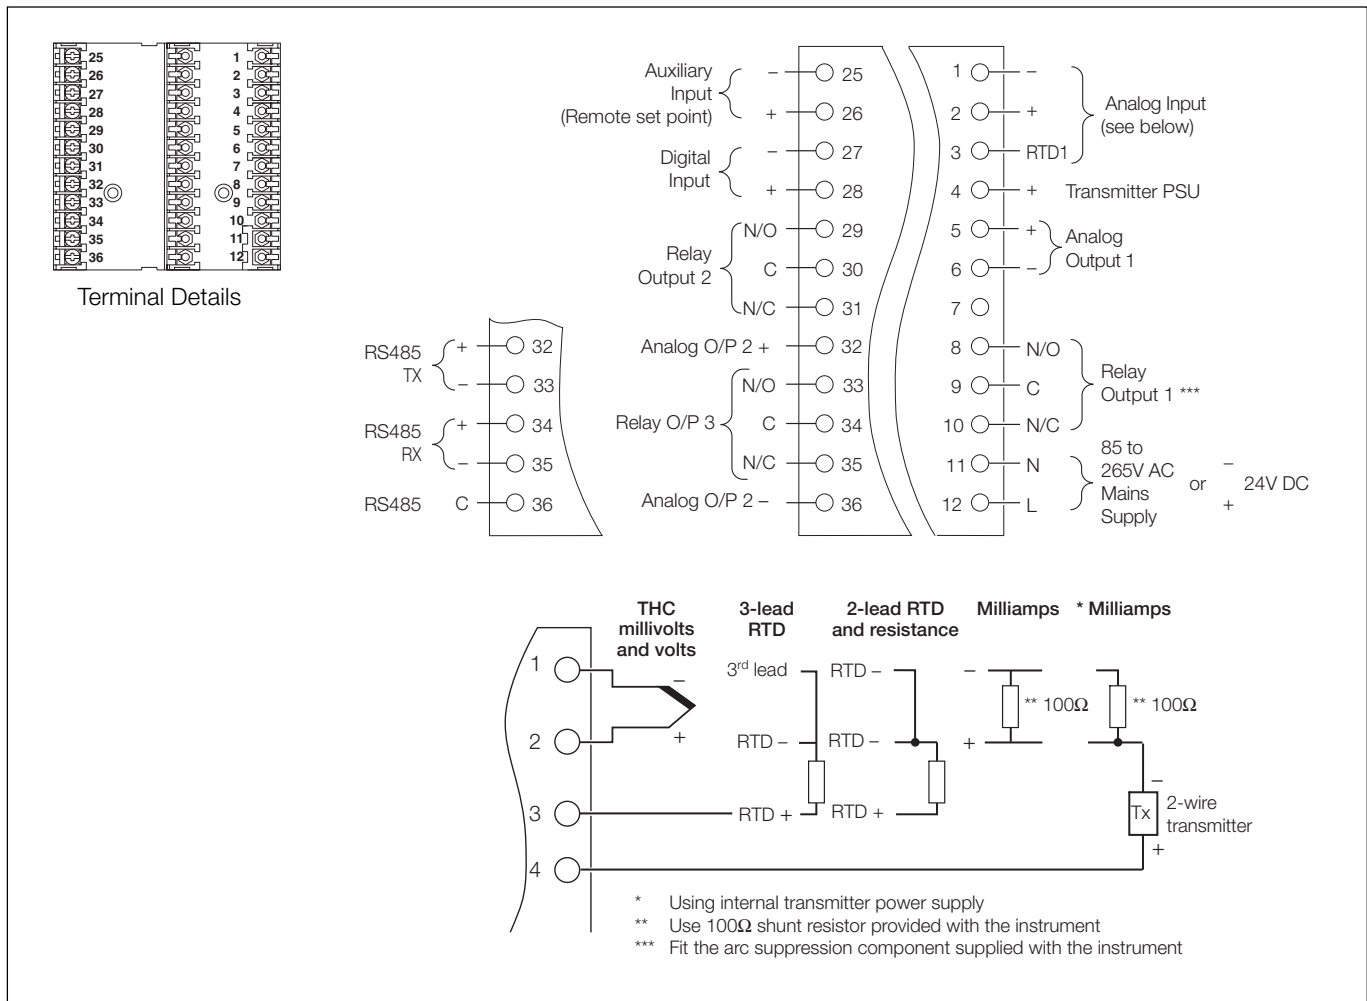

Ordering Information

V250 1/4 DIN Motorized Valve Controller	V250 /	X X	X	X /	X X X X
Options					
Standard *		0 1			
1 additional alarm relay + 1 digital input + remote set point 4 to 20mA		0 2			
1 digital input + remote set point + RS485/Modbus		0 3			
Power Supply					
85V to 265V AC			0		
24V DC			1		
Build					
ABB Standard				0	
Programming/Special Features					
Configured to factory standard					S T D
Configured to customer requirements					C U S
Special features					S P X X

*As standard the V250 is fitted with 2 relays (open/close), 4 to 20mA retransmission, universal input and transmitter power supply.

Accessories

PC Configuration Kit (part no. C100/0700)

Licensing, Trademarks and Copyrights

Modbus™ is a trademark of Modicon, Inc.

Windows™ is a trademark of the Microsoft Corp.



ABB has Sales & Customer Support
expertise in over 100 countries worldwide

The Company's policy is one of continuous product
improvement and the right is reserved to modify the
information contained herein without notice.

Printed in UK (09.02)

© ABB 2002

ABB

Distributed by

PO Box 1 • Ilkley • West Yorkshire • LS29 8EU
Phone: 01943 602001 • Fax: 01943 816796
Website: www.issltd.co.uk • Email: sales@issltd.co.uk

Instrumentation
Systems & Services Ltd

SS/V250 Issue 3



Tel: (01943) 602001- WWW.ISSLTD.CO.UK - Fax: (01943) 816796

